


# Horizontally Perforated Brick ΛNo180

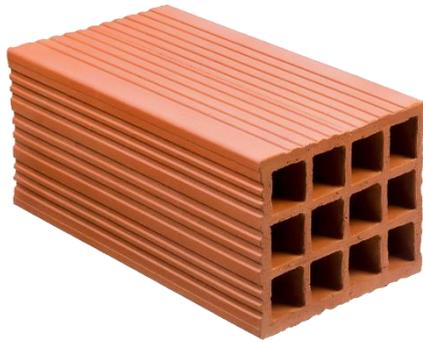

UNITS /  
PALETTE :  
**105**

 **EPD**<sup>®</sup>  
THE INTERNATIONAL EPD<sup>®</sup> SYSTEM

 **EPD**<sup>®</sup>  
CLIMATE DECLARATION



Horizontally Perforated Clay Brick, for use in protected masonry, category II, certified according to EN 771-1:2011+A1:2015.

## TECHNICAL DATA

Dimensions (LxWxH) (mm)	330x180x140
Weight per Unit (kg/unit)	5,50
Masonry Thickness (mm)	180 / 140
Units/m <sup>2</sup>	20 / 15
Estimated Masonry Weight (kg/m <sup>2</sup> ) without mortar	110,00 / 82,50
Gross Dry Density (kg/m <sup>3</sup> )	600
Net Dry Density (kg/m <sup>3</sup> )	1.550
Mean Compressive Strength (perpendicular to bed face) (N/mm <sup>2</sup> )	≥ 3
Water Vapour Permeability μ	5 / 10
Durability against freeze/thaw	F0
Reaction to Fire	A1