


Horizontally Perforated Brick No2

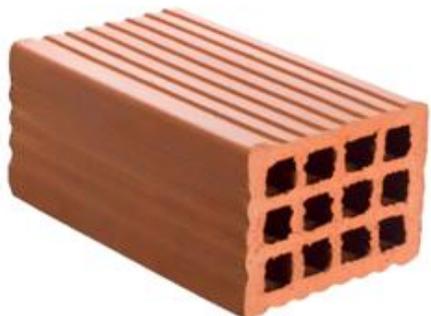

UNITS /
PALETTE:
495

 **EPD**[®]
THE INTERNATIONAL EPD[®] SYSTEM

 **EPD**[®]
CLIMATE DECLARATION



Horizontally Perforated Clay Brick, for use in protected masonry, category II, certified according to EN 771-1:2011+A1:2015.

TECHNICAL DATA

Dimensions (LxWxH) (mm)	190x120x90
Weight per Unit (kg/unit)	1,85
Masonry Thickness (mm)	120 / 90
Units/m ²	50 / 38
Estimated Masonry Weight (kg/m ²) without mortar	92,50 / 70,30
Gross Dry Density (kg/m ³)	900
Net Dry Density (kg/m ³)	1.900
Mean Compressive Strength (perpendicular to bed face) (N/mm ²)	≥ 3,0
Water Vapour Permeability μ	5 / 10
Durability against freeze/thaw	F0
Reaction to Fire	A1