


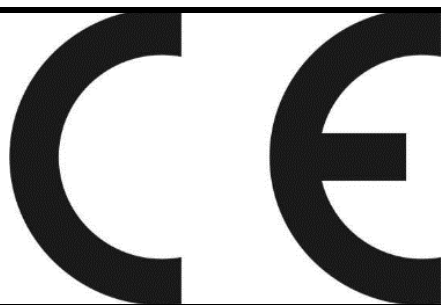

NORTHERN GREECE CERAMICS S.A.

Nea Santa, Kilkis, 61 100, Greece

24

EN 998-2:2016

BOND-24

Thin layer masonry mortar

Compressive strength:	Class M10
	Cement: 13%
Proportion of constituents:	Filler: 87%
	Additives: <0,5%
Contents of chlorides:	< 0,1 %
Reaction to fire:	Euroclass A1
Water absorption:	$\leq 0,70 \text{ kg}/(\text{m}^2 \cdot \text{min}^{0,5})$
Water vapour permeability:	$\leq 15/35$
Thermal conductivity ($\lambda_{10,\text{dry}}$):	0,61 W/mK